



APPLAUSE FLOOR HINGE (WOODEN DOOR)

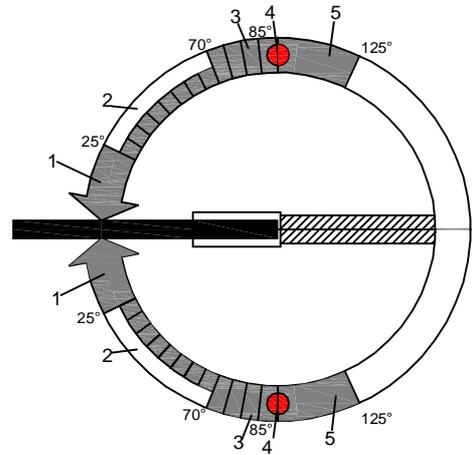




1. Closing range: 25°-0° (adjusted by valve 2)
2. Closing range: 70°-25° (adjusted by valve 1)
3. Closing range: 85°-70° (non-adjustable)
4. Hold-open : 90°-125°
5. Open angle : 125° (maximum)

Bill of Material

TJ108E

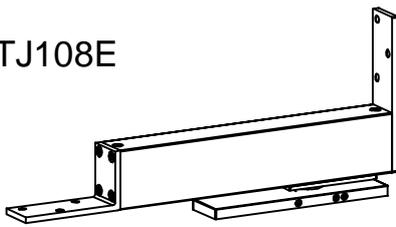


≥36mm



FOR TJ108E.80



TJA06



≥40mm





TJA02B





FOR TJ108E.100

DOOR THICKNESS


Installation Guide

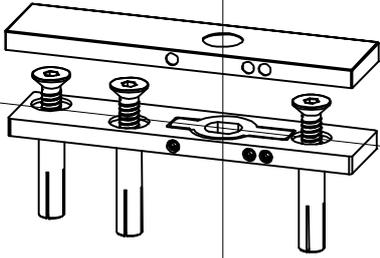


1. Determine the position of floor hinge to be installed and ensure the horizontal position of base seat. Install the cover plate after base seat is fixed .

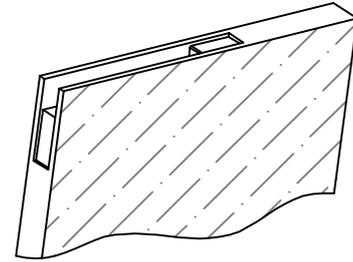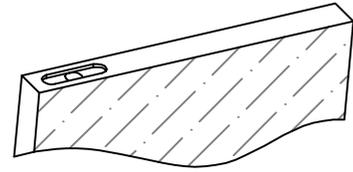


2. Prepare notches according to the template provided.

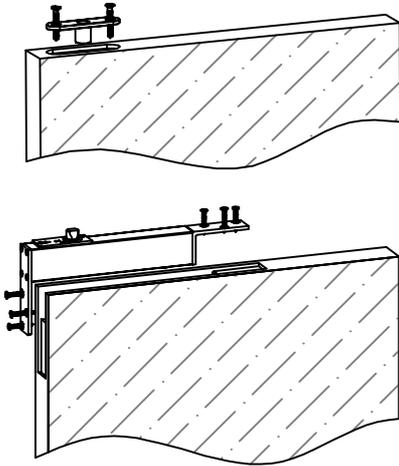


3. Fix the floor hinge and top pivot onto door leaf by wood screws.

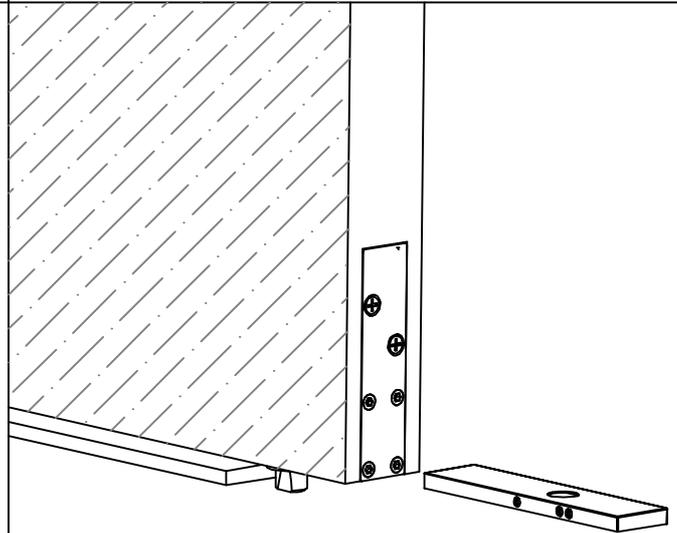

4. Install the floor hinge onto base seat and fix the top pivot with ceiling pivot. At this step, the setting screws on base seat should be loosen.

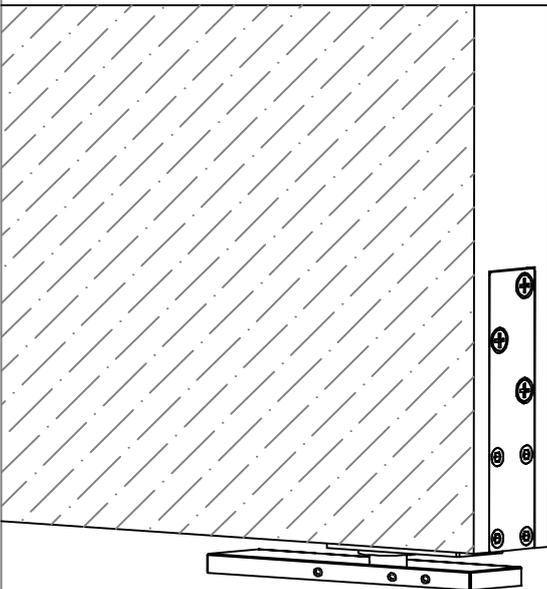

5. Ensure the alignment of door panel by adjusting the set screws on the base seat.

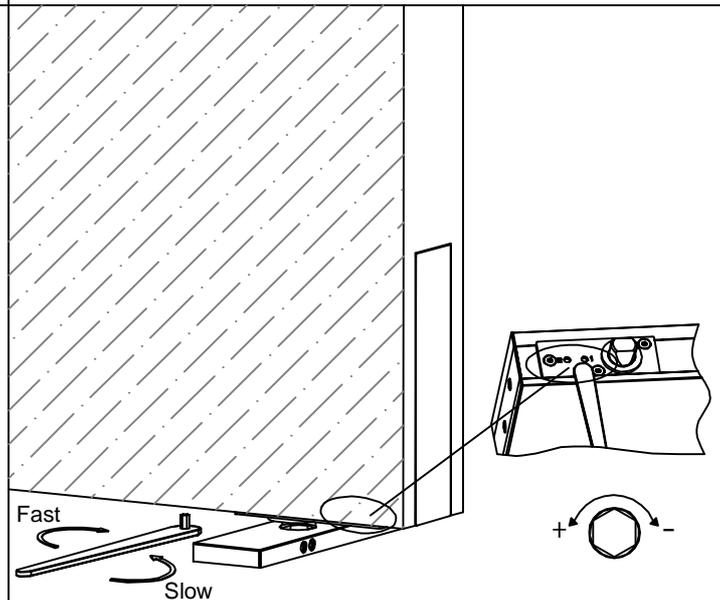

6. Adjust the required closing speed by allen key, and installation is done.