


無極芯隱藏式門鉸


左拉開式 (90°定位)			
型號	上鉸鏈	下鉸鏈	承重
WJ307.80R	WJ307BR.80	WJ307BSL.80	80kg
WJ307.60R	WJ307BR.60	WJ307BSL.60	60kg
右拉開式 (90°定位)			
型號	上鉸鏈	下鉸鏈	承重
WJ307.80L	WJ307BL.80	WJ307BSR.80	80kg
WJ307.60L	WJ307BL.60	WJ307BSR.60	60kg
不分左右 (不定位)			
型號	上鉸鏈	下鉸鏈	承重
WJ307.80U	WJ307BL.80	WJ307BR.80	80kg
	WJ307BR.80	WJ307BL.80	80kg
WJ307.60U	WJ307BL.60	WJ307BR.60	60kg
	WJ307BR.60	WJ307BL.60	60kg

## 產品明細

只有下鉸鏈需要安裝承重墊片，  
上鉸鏈底座不需安裝此組件。



不定位



(1)



(1)



(1)



(1)

≥38mm



(1)



(6)




(1)




(1)

WJ307.60用



90°定位



(1)



(1)




(1)



(1)

≥45mm



(1)



(6)



(1)




(1)


WJ307.80用

門扇厚度


# 安裝步驟

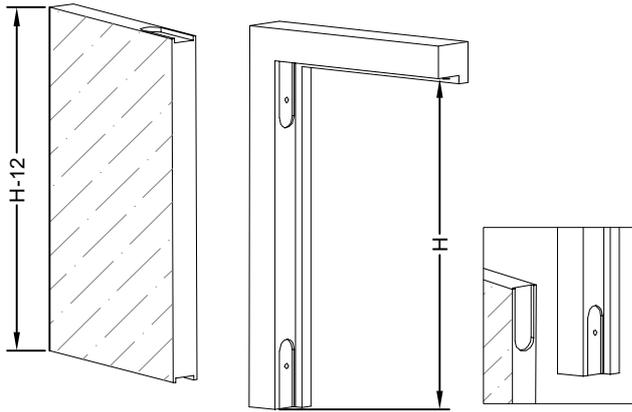


1. 確定安裝位置，按照紙規開孔。

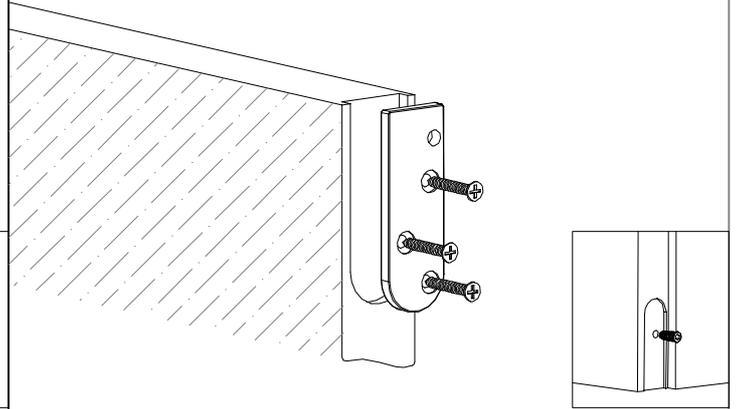


2. 安裝自攻螺套於門框開孔位置，以木牙螺絲將鉸鏈主體安裝在門扇內。

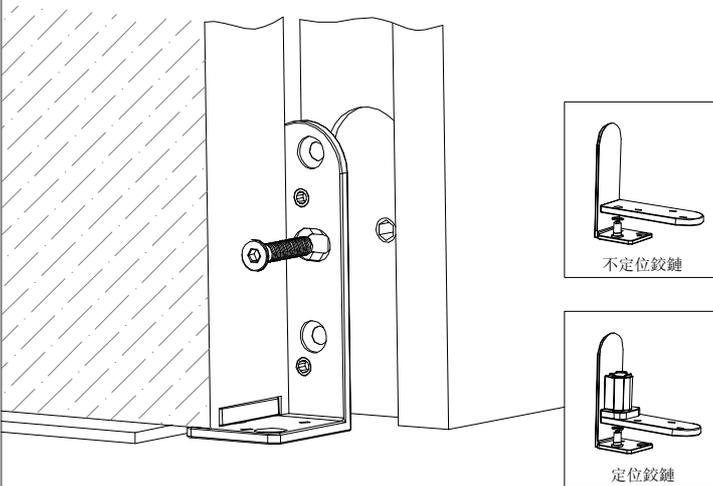


3. 墊起門扇，打開鉸鏈至 90°，下底座套入承重墊片並將鉸鏈底座以機牙螺絲安裝在門框上（上鉸鏈底座不需套入承重墊片）。

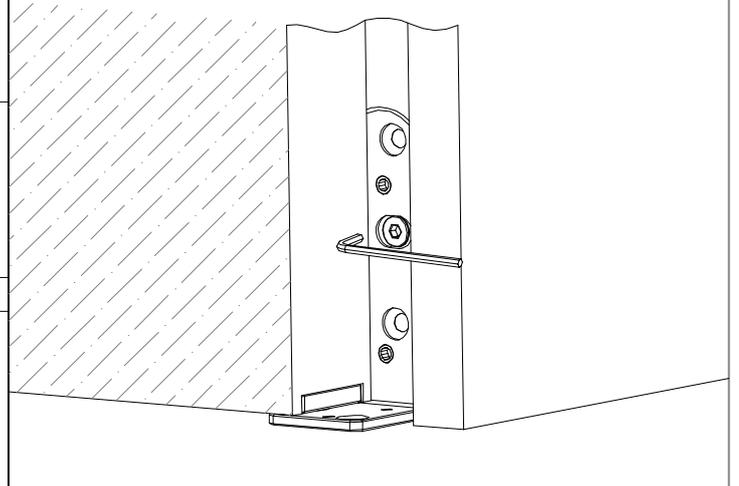

4. 略鬆機牙螺絲，手動調節門框方之內外垂直度，完成後收緊所有機牙螺絲。

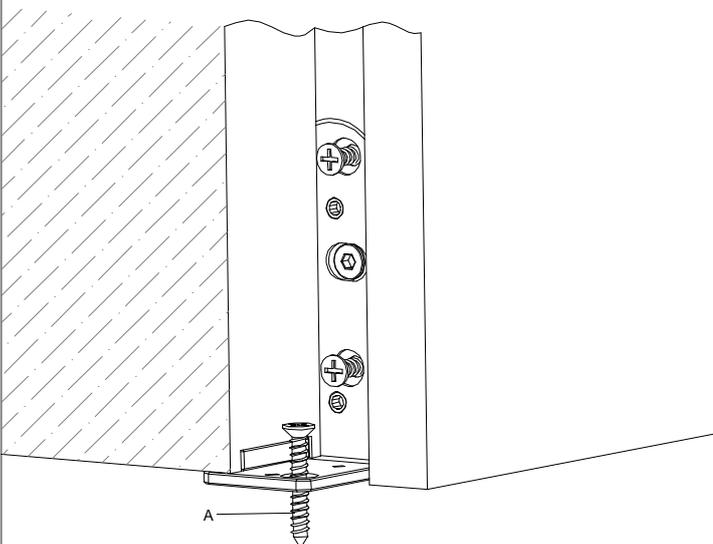

5. 開關門扇，確定操作順暢及無異聲後，安裝所有木牙螺絲（木牙螺絲A可因應場景而選擇性安裝）。

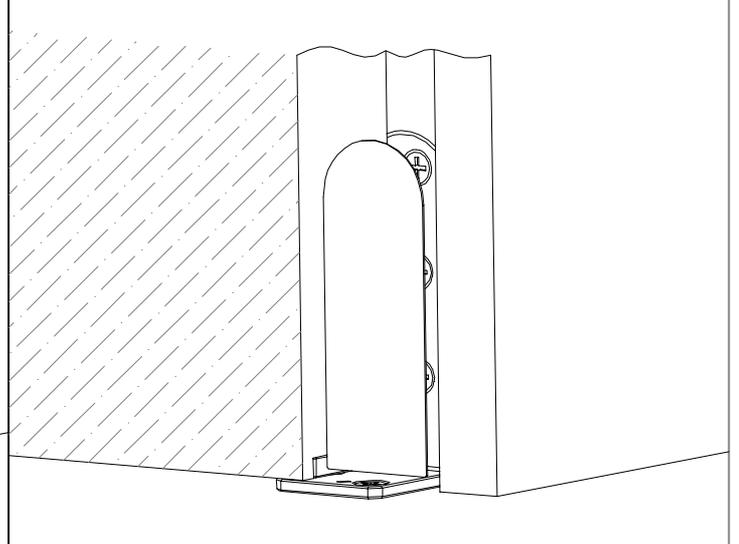

6. 安裝面蓋，安裝完成。